


▶ EK-BV24S9V/EK-BV24S25V

配件：

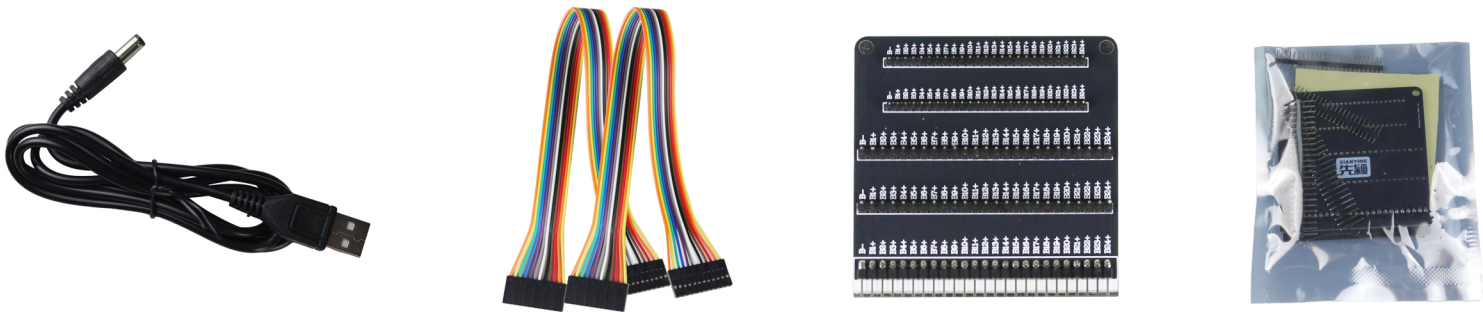

EK-BV24S9V/EK-BV24S25V Parameter Description	
Size(mm)	140*87.5*30mm
Weight	0.3kg
Battery string	1~24S
Battery type	lithium batteries such as ternary lithium and lithium iron phosphate with voltages between 0.3 and 9.0V
Voltage Display Accuracy	0.001V
Voltage Measurement Range	0.1V-5.0V
Voltage Sampling Accuracy	± (0.05%+0.003V)
Single-Channel Internal Resistance Measurement Range	0.3V~9.0V
Chinese-English display conversion	Press and hold the button in the upper left corner for about 15 seconds to switch to English
Power supply	Use a 5V2A mobile phone charger, power bank for power supply, or use a DC5V~12V adapter for power supply

EK-BV24S9V/EK-BV24S25V Instructions

产品图示

